


Inner linings AF-S for the storage of liquid fertiliser AHL, AdBlue®

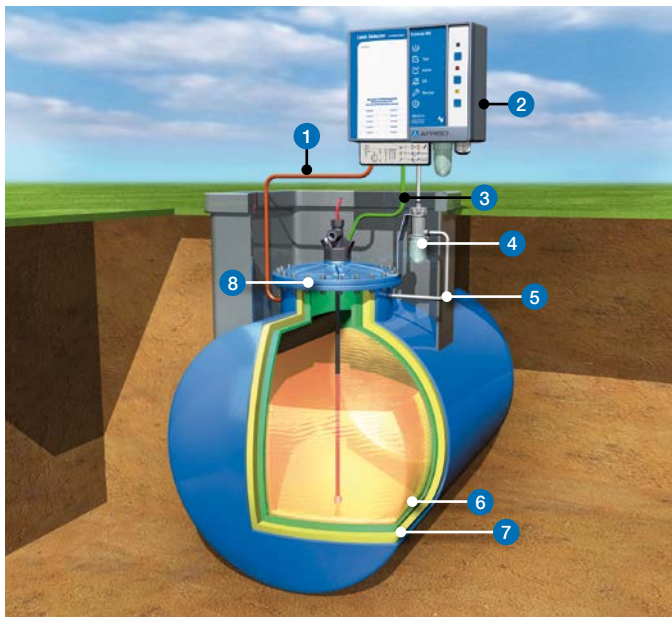

- | | |
|-------------------------|--|
| 1 Measuring line | 5 Suction line/suction line perforated |
| 2 Eurovac leak detector | 6 Inner lining |
| 3 Exhaust line | 7 Intermediate layer (fleece) |
| 4 Liquid barrier | 8 Fastening ring |

Application

For liquid fertiliser AHL and urea solution 32.5 % AdBlue®. Enquire for other liquids.

Description

Plastic inner linings, blue, with Technical Approval of the German Institute for Civil Engineering (DIBt) for cylindrical standard tanks, rectangular tanks consisting of steel, glass fibre reinforced or asbestos cement manufactured on site. Made of PVC film WP6120, 0.8 mm thick.

When AdBlue® is stored, the surface temperature must not exceed 35 °C!

Approval for construction products

DIBt: Z-65.30-483

Inner linings for AHL and AdBlue® for cylindrical standard tanks (EN/DIN)

DG: H, PG: 1	Part no.	Price €
Inner linings for AHL and AdBlue® for rectangular tanks per m²	43870	
Stainless steel fastening ring V2A flat steel (without seal), 40 x 8 mm, glass bead blasted, 500 mm diameter.	43900N	
Stainless steel fastening ring V2A flat steel (without seal), 40 x 8 mm, glass bead blasted, 600 mm diameter.	439000	

DG: H, PG: 1	Part no.	Price €
3,000 l	43880.003	
5,000 l	43880.005	
7,000 l	43880.007	
10,000 l	43880.010	
13,000 l	43880.013	
15,000 l	43880.015	
16,000 l	43880.016	
20,000 l	43880.020	
25,000 l	43880.025	
30,000 l	43880.030	
40,000 l	43880.040	
50,000 l	43880.050	
60,000 l	43880.060	
80,000 l	43880.080	
100,000 l	43880.100	

on request

*Please enquire for larger linings and other shapes. Scope of delivery does not include accessories.

i

On request:

- Dimensional drawings for customised inner linings
- Complete tank protection packages
- Training seminars on installation of inner linings and leak detectors