


# Universal wireless transmitter FTM



- Equipment can be integrated into building automation systems via voltage-free contact
- Transmitters for a wide range of AFRISO probes
- Compact design

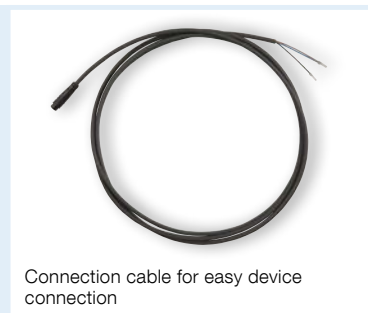

Connection cable for easy device connection



Page 116



Page 117



Page 115

5

**Application** Monitoring of the switching states of voltage-free contacts. In addition, transmission of ambient temperature.

**Description** The universal wireless transmitter can integrate any device with a voltage-free contact into a building automation system. Examples comprise the alarm relays of heating systems or status messages of alarm systems. The voltage-free contact is supplied with voltage by the universal wireless transmitter. A defined recipient is immediately notified of each state transition via EnOcean® wireless. The universal wireless transmitter is used as a transmission unit for many AFRISO probes such as Minimelder or Maximelder, pressure gauges with electrical contact, etc. The energy required to send the message with the state transition is generated by means of an integrated photovoltaic cell; it is also possible to use a battery in dark rooms. The AFRISOhome gateway transmits alarm messages and state transition messages via WLAN or LAN to the person in charge (for example, to the owner, the facility manager, the janitor or other configured contacts); the message includes information on which universal transmitter radio FTM has signalled the state transition. The AFRISOhome gateway in conjunction with additional AFRISO products with EnOcean® wireless technology allows the user to configure a whole range of fully customisable, extensible applications.

- Floor water probe (for water detection)
- Minimelder (for signalling minimum levels in tanks)
- Maximelder (for signalling maximum levels in tanks)
- Pressure gauge with electrical contact (for signalling limit values)

## Technical specifications

### Operating temperature range

Ambient: 0/40 °C  
Storage: -20/+60 °C

### Temperature measuring range

Measuring range: 0/40 °C  
Accuracy: ±1 K

### Supply voltage

Energy harvesting (via photovoltaic cell)  
or 1/2 AA lithium battery, DC 3.6 V  
(with daylight less than 200 lx)

### Housing

Colour: White, similar to RAL 9003  
W x H x D: 52 x 40 x 17 mm  
Weight: 22 g  
Degree of protection: IP 54 (EN 60529)

### EnOcean® wireless

EEP: A5-30-03  
Frequency: 868.3 MHz  
Transmission power: Max. 10 mW  
Range: 10 to 30 m (depending on room arrangement and materials in the building)

### Scope of delivery

- Universal wireless transmitter FTM
- Wall bracket
- 2 x adhesive dots
- Without battery

### Necessary additional components

- AFRISO probe with plug-in connector (see Accessories)
- AFRISOhome gateway



See operating instructions for detailed information on the range of the EnOcean® wireless module.

DG: L, PG: 4	Part no.	Price €
<b>Universal wireless transmitter FTM</b>	<b>78143</b>	
<b>Connection cable 2 m</b>	<b>78974</b>	