

Bimetal standard thermometers/surface mount thermometers/flue gas thermometers



Bimetal standard thermometers

Application Heating, plumbing

Technical specifications

Nominal size
50 – 63 – 80 – 100

Measuring element
Bimetal helix

Accuracy class
2 (EN 13190)

Ranges °C
-20/+60, 0/60, 0/120, 0/160

Application area
Full scale value

Operating pressure at thermowell
Max. 6 bar

Standard version

Connection
Stem plastic, brass or aluminium, Ø 9 mm
Thermowell G½B, brass, removable (160 °C and higher with locking screw)

Mounting position
NG 50 – 63 – 80 – 100
NG 63 – 80 – 100 bottom

Dial
Up to 120 °C plastic, greater than 160 °C aluminium, white
Dial marking black

Pointer
Plastic, black


Housing
Sheet steel galvanised

Push on bezel
Sheet steel nickel-plated

Window
Plastic

Options

- Other ranges
- Nominal size 34, 160



Surface mount thermometer ATH

Heating, ventilation and plumbing. Fastening by means of spring (ATH Ø F), magnet (ATH Ø M) or universal clamp (ATH Ø S)

Nominal size
63 – 80

Measuring element
Bimetal spiral

Ranges °C
-20/+40, 0/60, 0/120

Application area
Full scale value

Connection
ATH Ø F: With heat-conducting element and universal clamp;
ATH Ø S with universal clamp for pipes 3/8" to 1 1/2".
ATH Ø M: 2 x magnet Ø20 mm

Mounting position
NG 63 – 80 centre back

Dial
Plastic, white;
dial marking black

Pointer
Plastic, black

Housing
ATH Ø F: Sheet steel, galvanised
ATH Ø M: Plastic, black
ATH Ø S: Sheet steel, galvanised

Push on bezel
Sheet steel nickel-plated

Window
Plastic

Options

- Other ranges
- Plastic housing



Flue gas-thermometer RT / flue gas temperature controller RTC

Flue gas thermometer RT and flue gas temperature controller RTC for gas and oil fired systems

Nominal size
80

Measuring element
Bimetal helix

Ranges °C
RT: 0/300, 0/500
RTC: 0/350

Application area
Full scale value

Connection
RT: Stem stainless steel 316 L, plain, with adjustable cone, brass
RTC: Stem stainless steel 316 L, plain, with ring magnet bracket

Mounting position: centre back

Dial
Aluminium, grey – dial marking black; RTC with green and red reference zones

Pointer
Aluminium, black
RTC with additional max. pointer, red

Housing
Sheet steel galvanised

Push on bezel
Sheet steel nickel-plated

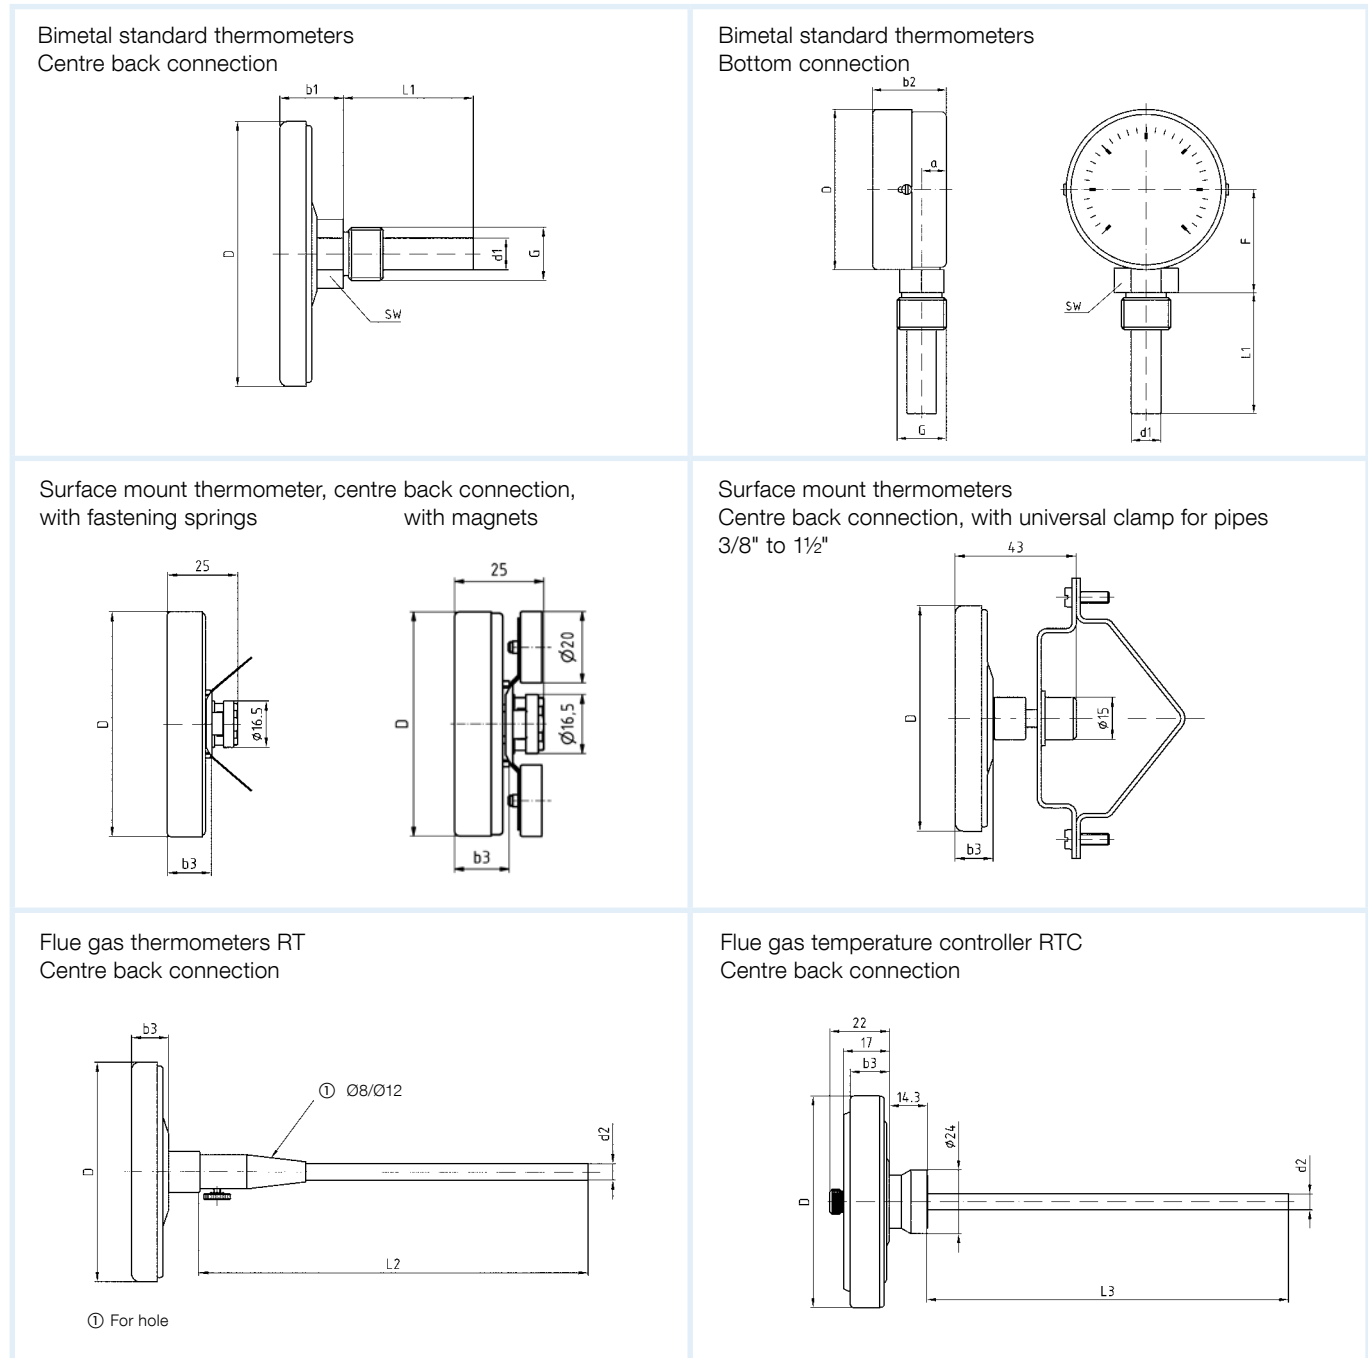
Window
Plastic



See page 357 for prices.

Bimetal standard thermometers/surface mount thermometers/flue gas thermometers

Housing types and dimensions (mm)









11

Dimensions (mm)

Nominal size (NG)	a	b ₁	b ₂	b ₃	D	d ₁	d ₂	F	G	L ₁	L ₂	L ₃	SW
50	-	18	-	-	50	12	-	-	G _{1/2} B	40	141 191 291	86 136	19/22
63	10	20	35	15	63	12	-	29.3	G _{1/2} B	63			19/22
80	10	21	33	15	80	12	6	47.3	G _{1/2} B	100			19/22
100	10	23.7	40.5	-	100	12	-	59.3	G _{1/2} B	150			19/22

Surface mount thermometers/eccentric thermometers




DG: G, PG: 3

Type	ATh 63 S	ATh 63 F*	ATh 80 F*	ATh 63 M	ATh 80 M	BiTh 63 exz
Version						
Housing Ø	63	63	80	63	80	63
Housing	Sheet steel galvanised, push on bezel nickel-plated, plastic window			Plastic, black, push on bezel nickel-plated, plastic window		Plastic
Connection	Universal clamp for pipes $\frac{3}{8}$ " to $1\frac{1}{2}$ "	Heat-conducting element with fastening spring for pipes $\frac{3}{8}$ " to $1\frac{1}{2}$ "		2 x magnet Ø 20 mm		Eccentric male connector Ø 15 mm
Accuracy class	Class 2 as per EN 13190					
Range	0/120 °C	0/120 °C	0/120 °C	0/120 °C	0/120 °C	20/100 °C
	Price € Part no.	Price € Part no.	Price € Part no.	Price € Part no.	Price € Part no.	Price € Part no.
Dial black	63820	63822	63821	63651	63653	68895
Dial red	---	---	---	---	---	63920
Dial blue	---	---	---	---	---	63921
Range	0/60 °C	0/60 °C	0/60 °C	0/60 °C	0/60 °C	0/60 °C
	---	63826	63943	63650	63652	---
Range	---	-20/+40 °C	---	---	---	---
	---	64339	---	---	---	---

*ATh 63 F/ATh 80 F are also available with plastic housing.

Flue gas thermometers/flue gas temperature controllers

DG: G, PG: 3

Type	RT 80	RT 80	RTC 80
Version			
Housing Ø	80	80	80
Housing	Sheet steel galvanised, push on bezel nickel-plated, plastic window		
Connection	Plain stem Stainless steel 316 L Adjustable cone Brass, nickel-plated 8 – 12 mm	Plain stem Stainless steel 316 L Adjustable cone Stainless steel 12 – 18 mm	Plain stem stainless steel 316, magnet
Accuracy class	Class 2 as per EN 13190		
Range	0/300 °C	0/500 °C	0/350 °C
Stem length	Price € Part no.	Price € Part no.	Price € Part no.
100 mm	---	---	63833
150 mm	64238	63830	63832
300 mm	64239	63831	---