

Vario-DP



Benefits

- Automatic control of water volume
- Fast hydraulic balancing without measuring instrument
- High reserve due to adjustment range up to 290 l/h
- Patented, simple valve insert provides protection against pollution

Versions

combination block Vario-DP for compact radiators/bathroom radiators with $\ensuremath{\text{G}}\xspace{$\%$}$ female thread

	Version	Nominal diameter	Connection	Connection	Part no.
			To radiator	To pipe	raitiio.
4	Straight	DN 15	G½ male	G¾ male eurocone	221 075.100
44	Angled	DN 15	G½ male	G¾ male eurocone	221 025.100

Blue part no. = in-stock items

Technical specifications

System connection (radiator) G½ female

Nominal pressure Max. 10 bar

Nominal diameter DN 15 **Operating temperature range**Medium: Max. 90 °C

Housing


Brass, nickel-plated



1/2 www.afriso.de



Detail views

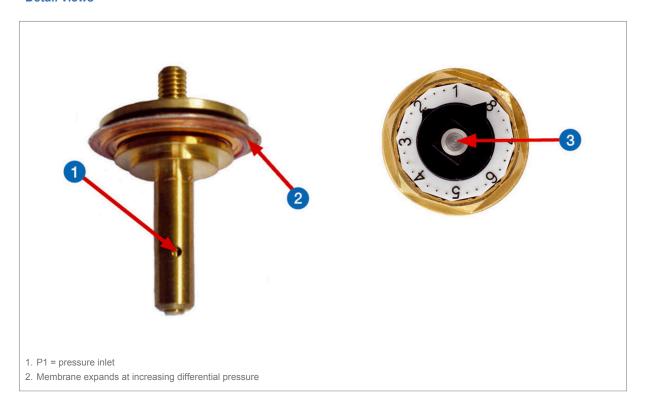

Technical drawings

